



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B41M 5/30, C07C 311/60, 317/50, 311/62, 311/51	A1	(11) International Publication Number: WO 00/35679 (43) International Publication Date: 22 June 2000 (22.06.00)
(21) International Application Number: PCT/EP99/09473 (22) International Filing Date: 3 December 1999 (03.12.99) (30) Priority Data: 9827569.6 16 December 1998 (16.12.98) GB (71) Applicant (for all designated States except US): CIBA SPECIALTY CHEMICALS HOLDING INC. [CH/CH]; Klybeckstrasse 141, CH-4057 Basel (CH). (72) Inventors; and (75) Inventors/Applicants (for US only): HENEGHAN, Michael [GB/GB]; 8 Rudyard Road, Salford M6 7QN (GB). KIRK, Roy, Alan [GB/GB]; 61 Parrswood Avenue, Didsbury, Manchester M20 5NB (GB). TAYLOR, James, Philip [GB/GB]; 7 Old Hall Street, Macclesfield, Cheshire SK10 2DT (GB). WHITWORTH, John [GB/GB]; 4 Rivington Grove, Audenshaw, Manchester M34 5GG (GB). O'NEIL, Robert, Montgomery [GB/GB]; 54 Derwent Road, Flixton, Manchester M41 8UA (GB). HENSHALL, John, Barry [GB/GB]; 61 Queens Road, Urmston, Manchester M41 9HF (GB).		(74) Common Representative: CIBA SPECIALTY CHEMICALS HOLDING INC.; Patentabteilung, Klybeckstrasse 141, CH-4057 Basel (CH). (81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: HEAT SENSITIVE RECORDING MATERIAL <div style="text-align: center;"> $\begin{array}{c} \text{O} \\ \parallel \\ \text{R}_1-\text{S}-\text{N}-\text{X}-\text{N}-\text{A}-\text{B}-\text{R}_2 \\ \parallel \\ \text{O} \end{array} \quad (1)$ </div> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> $\begin{array}{c} \text{NH} \\ \parallel \\ -\text{C}- \end{array} \quad (i)$ </div> <div style="text-align: center;"> $\begin{array}{c} \text{S} \\ \parallel \\ -\text{C}- \end{array} \quad (ii)$ </div> <div style="text-align: center;"> $\begin{array}{c} \text{O} \\ \parallel \\ -\text{C}- \end{array} \quad (iii)$ </div> </div> (57) Abstract <p>A heat sensitive recording material, comprising a) at least one colour forming compound, and b) at least one developer of formula (I), wherein R₁ is unsubstituted or substituted phenyl, naphthyl or C₁-C₂₀ alkyl, X is a group of formula (i), (ii) or (iii), A is unsubstituted or substituted phenylene, naphthylene or C₁-C₁₂ alkylene, or is an unsubstituted or substituted heterocyclic group, B is a linking group of formula -O-SO₂-, -SO₂-O-, -NH-SO₂-, -SO₂-NH-, -S-SO₂-, -O-CO-, -O-CO-NH-, -NH-CO-, -NH-CO-O-, -S-CO-NH-, -S-CS-NH-, -CO-NH-SO₂-, -O-CO-NH-SO₂-, -NH=CH-, -CO-NH-CO-, -S-, -CO-, -O-, -SO₂-NH-CO-, -O-CO-O- and -O-PO-(OR₂)₂, and R₂ is unsubstituted or substituted aryl or benzyl or C₁-C₂₀alkyl, with the proviso, that, if B is not a linking group of formula -O-SO₂-, R₂ is unsubstituted or substituted phenyl, naphthyl or C₁-C₈ alkyl and that, if B is -O-, R₂ is not alkyl.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Heat Sensitive Recording Material

The present invention relates to heat sensitive recording materials. It more particularly relates to such recording material in the form of a supporting substrate, for example, a paper sheet, synthetic paper sheet or plastic resin film coated with colour-forming systems comprising a colourless or pale coloured electron donative compound (colour forming compound) and an organic electron acceptor (developer).


Heat sensitive recording has conventionally been used as a system for recording transferred information through the mediation of heat, by utilising a colour reaction between a colour forming compound and a developer.

The properties which are most desirable in a colour forming material, in addition to the effective development of colour, are thermal response, background whiteness and image stability, especially light fastness of the developed colour, heat and moisture fastness of the developed colour, oil fastness of the developed colour, plasticiser resistance of the developed colour and water fastness of the developed colour.

A need exists to improve the above properties and to improve the archival capabilities of such recording materials. It is an object of the present invention to provide heat sensitive recording materials with improved properties, especially to provide an increase in image stability whilst improving the background whiteness of the paper before imaging and the background whiteness of the undeveloped portion after imaging.

The present invention is directed to a heat sensitive recording material, comprising

- a) at least one colour forming compound, and
- b) at least one developer of the formula



wherein

R₁ is unsubstituted or substituted phenyl, naphthyl or C₁-C₂₀alkyl,

- 2 -

X is a group of the formula $\begin{array}{c} \text{NH} \\ || \\ -\text{C}- \end{array}$, $\begin{array}{c} \text{S} \\ || \\ -\text{C}- \end{array}$ or $\begin{array}{c} \text{O} \\ || \\ -\text{C}- \end{array}$,

A is unsubstituted or substituted phenylene, naphthylene or $\text{C}_1\text{-C}_{12}$ alkylene, or is an unsubstituted or substituted heterocyclic group,

B is a linking group of formula $-\text{O}-\text{SO}_2-$, $-\text{SO}_2-\text{O}-$, $-\text{NH}-\text{SO}_2-$, $-\text{SO}_2-\text{NH}-$, $-\text{S}-\text{SO}_2-$, $-\text{O}-\text{CO}-$, $-\text{O}-\text{CO}-\text{NH}-$, $-\text{NH}-\text{CO}-$, $-\text{NH}-\text{CO}-\text{O}-$, $-\text{S}-\text{CO}-\text{NH}-$, $-\text{S}-\text{CS}-\text{NH}-$, $-\text{CO}-\text{NH}-\text{SO}_2-$, $-\text{O}-\text{CO}-\text{NH}-\text{SO}_2-$, $-\text{NH}=\text{CH}-$, $-\text{CO}-\text{NH}-\text{CO}-$, $-\text{S}-$, $-\text{CO}-$, $-\text{O}-$, $-\text{SO}_2-\text{NH}-\text{CO}-$, $-\text{O}-\text{CO}-\text{O}-$ and $-\text{O}-\text{PO}-(\text{OR}_2)_2$, and

R_2 is unsubstituted or substituted aryl or benzyl or $\text{C}_1\text{-C}_{20}$ alkyl,

with the proviso, that, if B is not a linking group of formula $-\text{O}-\text{SO}_2-$, R_2 is unsubstituted or substituted phenyl, naphthyl or $\text{C}_1\text{-C}_8$ alkyl and that, if B is $-\text{O}-$, R_2 is not alkyl.

R_1 as phenyl or naphthyl can be unsubstituted or substituted by, for example, $\text{C}_1\text{-C}_8$ alkyl, $\text{C}_1\text{-C}_8$ alkoxy or halogen. Preferred substituents are $\text{C}_1\text{-C}_4$ alkyl, especially methyl or ethyl, $\text{C}_1\text{-C}_4$ alkoxy, especially methoxy or ethoxy, or halogen, especially chlorine. R_1 as naphthyl is preferably unsubstituted. R_1 as phenyl is preferably substituted, especially by one of the above alkyl substituents.

R_1 as $\text{C}_1\text{-C}_{20}$ alkyl can be unsubstituted or substituted by, for example $\text{C}_1\text{-C}_8$ alkoxy or halogen. Preferred substituents are $\text{C}_1\text{-C}_4$ alkoxy, especially methoxy or ethoxy, or halogen, especially chlorine. R_1 as $\text{C}_1\text{-C}_{20}$ alkyl is preferably unsubstituted.

Preferably, R_1 is phenyl which is unsubstituted or substituted by $\text{C}_1\text{-C}_8$ alkyl, $\text{C}_1\text{-C}_8$ alkoxy or halogen. Of most importance are the substituted phenyl groups. Highly preferred are phenyl groups which are substituted by $\text{C}_1\text{-C}_4$ alkyl, preferably by methyl.

X is preferably a group of the formula $\begin{array}{c} \text{S} \\ || \\ -\text{C}- \end{array}$ or $\begin{array}{c} \text{O} \\ || \\ -\text{C}- \end{array}$, especially a group of the

formula $\begin{array}{c} \text{O} \\ || \\ -\text{C}- \end{array}$.

- 3 -

A as a phenylene or naphthylene group can be unsubstituted or substituted by, for example, C₁-C₈alkyl, halogen-substituted C₁-C₈alkyl, C₁-C₈alkoxy-substituted C₁-C₈alkyl, C₁-C₈alkoxy, halogen-substituted C₁-C₈alkoxy, C₁-C₈alkylsulphonyl, halogen, phenyl, phenoxy or phenoxy-carbonyl. Preferred alkyl and alkoxy substituents are those containing 1 to 4 carbon atoms. Preferred substituents are C₁-C₈alkyl, halogen-substituted C₁-C₈alkyl, C₁-C₈alkylsulphonyl or halogen. A as a naphthylene group is preferably unsubstituted.

A as a heterocyclic group is preferably pyrimidylene which is unsubstituted or substituted by C₁-C₈alkyl, especially by C₁-C₄alkyl.

A as a C₁-C₁₂alkylene group is preferably C₁-C₈alkylene, especially C₁-C₄alkylene.

Preferred groups A are phenylene groups which are unsubstituted or substituted by C₁-C₈alkyl, halogen-substituted C₁-C₈alkyl, C₁-C₈alkoxy-substituted C₁-C₈alkyl, C₁-C₈alkoxy, halogen-substituted C₁-C₈alkoxy, C₁-C₈alkylsulphonyl, halogen, phenyl, phenoxy or phenoxy-carbonyl, especially C₁-C₈alkyl, halogen-substituted C₁-C₈alkyl, C₁-C₈alkylsulphonyl or halogen.

Highly preferred groups A are phenylene groups which are unsubstituted or substituted by C₁-C₄alkyl or halogen, especially unsubstituted phenylene groups.

Preferred linking groups B are those of formulae -O-SO₂-, -SO₂-O-, -SO₂-NH-, -S-SO₂-, -O-, -O-CO- and -O-CO-NH-, especially linking groups of formulae -O-SO₂-, -SO₂-O- and -SO₂-NH-. Highly preferred are the linking groups B of formula -O-SO₂- and -O-.

R₂ as aryl is preferably phenyl or naphthyl which can be unsubstituted or substituted by, for example, C₁-C₈alkyl, halogen-substituted C₁-C₈alkyl, C₁-C₈alkoxy-substituted C₁-C₈alkyl, C₁-C₈alkoxy, halogen-substituted C₁-C₈alkoxy or halogen. Preferred alkyl and alkoxy substituents are those containing 1 to 4 carbon atoms. Preferred substituents are C₁-C₄alkyl and halogen. R₂ as naphthyl is preferably unsubstituted.

R₂ as benzyl can be substituted by the substituents given for R₂ as phenyl or naphthyl. Unsubstituted benzyl is preferred.

- 4 -

R₂ as C₁-C₂₀alkyl is preferably C₁-C₈alkyl, especially C₁-C₆alkyl, and can be unsubstituted or substituted by, for example, C₁-C₈alkoxy, halogen, phenyl or naphthyl. Preferred are the unsubstituted alkyl groups, especially C₁-C₄alkyl.

Preferred groups R₂ are C₁-C₆alkyl; halogen-substituted C₁-C₆alkyl; phenyl-substituted C₁-C₆alkyl; naphthyl-substituted C₁-C₆alkyl; phenyl which is unsubstituted or substituted by C₁-C₈alkyl, halogen-substituted C₁-C₈alkyl, C₁-C₈alkoxy-substituted C₁-C₈alkyl, C₁-C₈alkoxy, halogen-substituted C₁-C₈alkoxy or halogen; naphthyl and benzyl which is substituted by C₁-C₄alkyl or halogen.

Highly preferred groups R₂ are C₁-C₄alkyl; halogen-substituted C₁-C₄alkyl; phenyl which is unsubstituted or substituted by C₁-C₄alkyl or halogen; naphthyl and benzyl which is unsubstituted or substituted by C₁-C₄alkyl or halogen, especially phenyl which is unsubstituted or substituted by C₁-C₄alkyl.

Preferred are developers of formula (1), wherein

R₁ is phenyl which is substituted by C₁-C₄alkyl, preferably by methyl,

X is a group of the formula

$$\begin{array}{c} \text{O} \\ || \\ -\text{C}- \end{array}$$


A is phenylene which is unsubstituted or substituted by C₁-C₄alkyl or halogen, preferably unsubstituted phenylene, like 1,3-phenylene,

B is a linking group of formula -O-SO₂- or -O- and

R₂ is phenyl, naphthyl or benzyl which is unsubstituted or substituted by C₁-C₄alkyl or halogen, especially phenyl which is substituted by C₁-C₄alkyl.


The compounds of formula (1) can be prepared in accordance with schemes 1-3 below;

- 5 -

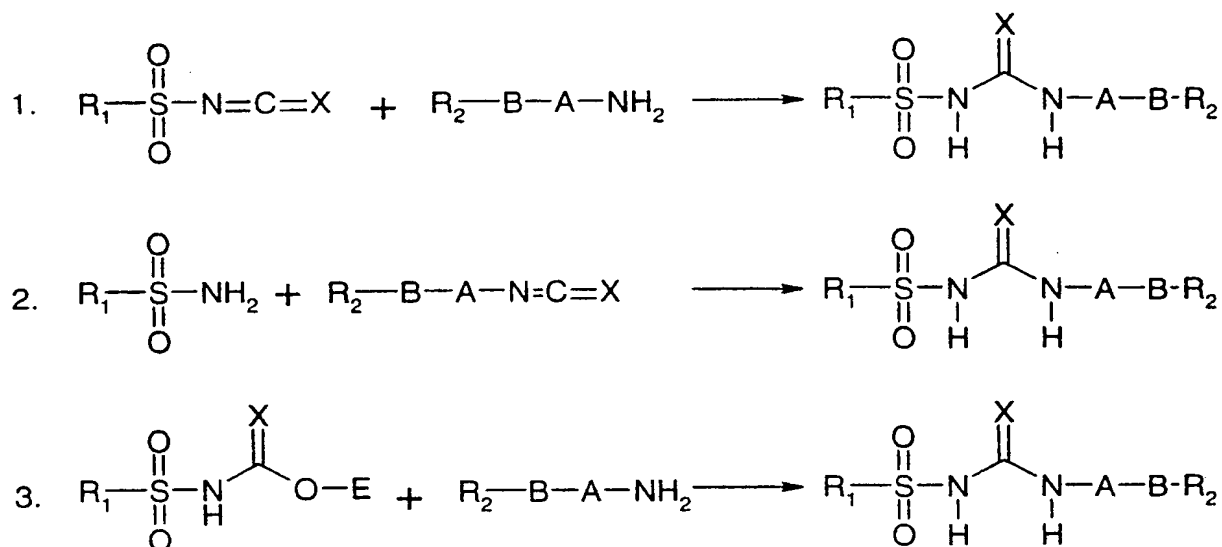

where R_1 , R_2 , A, B and X are as defined above and E is alkyl or aryl.

Furthermore, in the case where the species $\text{H}_2\text{N}-\text{A}-\text{B}-\text{H}$ is available the compounds of formula (1) can be prepared in accordance with scheme 4 below;

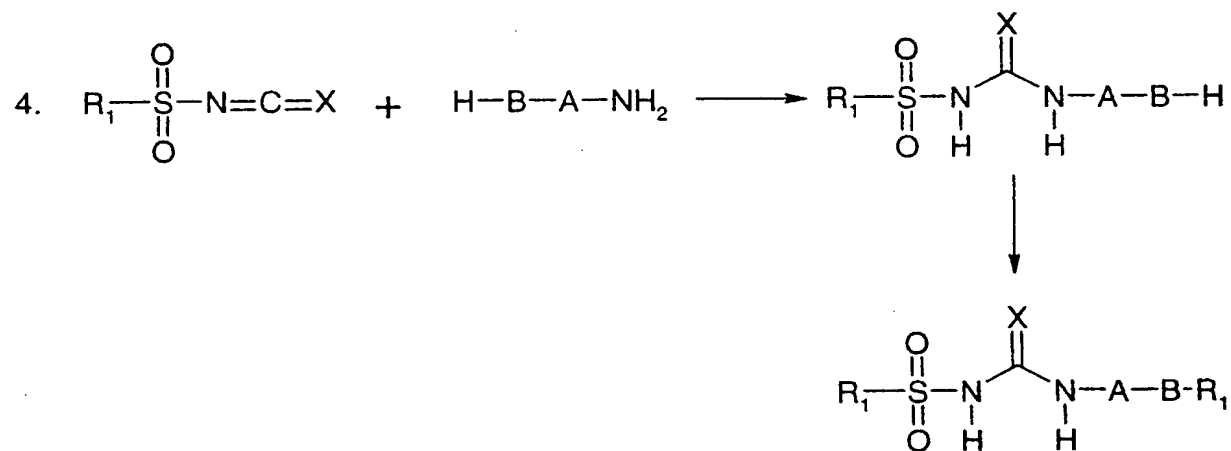

In the case of schemes 1, 2 and 4 the R_1 -sulphonylisocyanate (or R_1 -sulphonamide) is reacted with R_2 -amine (or R_2 -isocyanate) in the presence or absence of an organic solvent. Preferably in the presence of an (apolar or polar) aprotic solvent such as aromatic hydrocarbons, chlorinated aromatic hydrocarbons, aliphatic or alicyclic hydrocarbons, chlorinated hydrocarbons, dialkylacylamides, aliphatic esters, aliphatic ketones, alicyclic ketones, aliphatic ethers, cyclic ethers, alkyl nitriles and mixtures thereof. Most preferred are toluene, xylenes, petroleum ether, cyclohexane, dimethyl formamide, dimethylacetamide,


- 6 -

ethylacetate, propyl acetate, butylacetate, diethylether, dibutylether, tetrahydrofuran, acetone, butanone, cyclohexanone, nitromethane, acetonitrile, propionitrile, nitromethane, ethyleneglycoldimethylether, chloroform, dichloromethane, carbon tetrachloride, chlorobenzene, dichlorobenzene, dioxan or mixtures thereof. Polar protic solvents such as alcohols may also be used. The reaction is preferably carried out at 0-100°C preferably 0-40°C for up to 12 hours. The reaction may further be catalysed by tertiary amines, carboxylic acids, amides or ureas.

In the case of scheme 3, the reaction of carbamate $R_1SO_2NHCXOE$ with amine R_2BANH_2 may be carried out in excess amine, water, organic solvent or mixture thereof in the presence or absence of an inorganic or organic base. Typical solvents include those discussed hereinbefore. Bases used include alkali metal carbonates (K_2CO_3 , Na_2CO_3), alkali metal hydroxides (NaOH, KOH), alkali metal alkoxides (sodium methoxide), pyridine, tertiary amines such as triethylamine, diisopropylethylamine.

Many syntheses are known for sulphonyl ureas and are incorporated herein by reference (J.Med.Chem., 1990, (33), 9, 2393, Chem.Rev., 1952, (50), 1, Chem.Rev., 1965, (65), 365).

In addition, the present invention is directed to novel compounds of formula

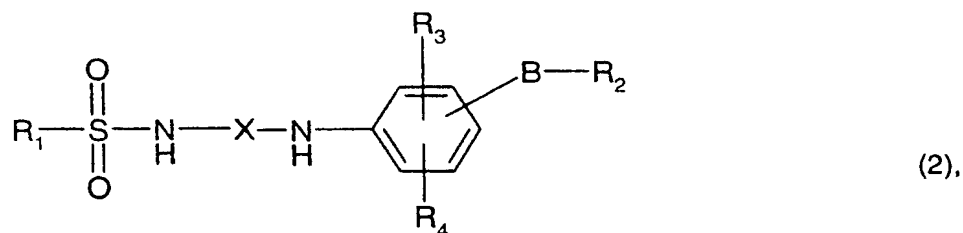

wherein

R_1 is unsubstituted or substituted phenyl, naphthyl or C_1 - C_{20} alkyl,

R_3 and R_4 independently of each other are hydrogen, C_1 - C_8 alkyl, halogen-substituted C_1 - C_8 alkyl, C_1 - C_8 alkoxy-substituted C_1 - C_8 alkyl, C_1 - C_8 alkoxy, halogen-substituted C_1 - C_8 alkoxy, C_1 - C_8 alkylsulphonyl, halogen, phenyl, phenoxy or phenoxy carbonyl,

X is a group of the formula $\begin{array}{c} \text{NH} \\ || \\ -\text{C}- \end{array}$, $\begin{array}{c} \text{S} \\ || \\ -\text{C}- \end{array}$ or $\begin{array}{c} \text{O} \\ || \\ -\text{C}- \end{array}$,

- 7 -

B is a linking group of formula $-O-SO_2-$, $-SO_2-O-$, $-SO_2-NH-$, $-O-CO-$, $-CO-NH-SO_2-$, $-SO_2-NH-CO-$, $-O-CO-O-$ or $-O-PO-(OR_2)_2$ and

R_2 is unsubstituted or substituted phenyl, naphthyl or C_1-C_{20} alkyl, with the proviso, that, if B is not a linking group of formula $-O-SO_2-$, R_2 is unsubstituted or substituted phenyl, naphthyl or C_1-C_8 alkyl.

As to R_1 , R_2 , X and B the above preferences apply.

Preferably, R_3 and R_4 are hydrogen, C_1-C_8 alkyl, halogen-substituted C_1-C_8 alkyl, C_1-C_8 alkylsulphonyl or halogen. Preferred alkyl and alkoxy groups R_3 and R_4 contain 1 to 4 carbon atoms. Highly preferred groups R_3 and R_4 are hydrogen, C_1-C_4 alkyl or halogen, especially hydrogen.

Of importance are compounds of formula (2), wherein

R_1 is phenyl which is substituted by C_1-C_4 alkyl, preferably by methyl,

X is a group of the formula $\begin{array}{c} O \\ || \\ -C- \end{array}$,

R_3 and R_4 independently of each other are hydrogen, C_1-C_4 alkyl or halogen, preferably hydrogen,

B is a linking group of formula $-O-SO_2-$, and

R_2 is phenyl which is unsubstituted or substituted by C_1-C_4 alkyl, especially phenyl which is substituted by C_1-C_4 alkyl.

The compounds of formula (2) can be prepared as given above for the compounds of formula (1).

The colour forming compounds are, for example, triphenylmethanes, lactones, benzoxazines, spiropyrans or preferably fluorans.

Preferred colour formers include but are not limited to; 3-diethylamino-6-methylfluoran, 3-dimethylamino-6-methyl-7-anilino-fluoran, 3-diethylamino-6-methyl-7-anilino-fluoran, 3-diethylamino-6-methyl-7-(2,4-dimethylanilino) fluoran, 3-diethylamino-6-methyl-7-chlorofluoran, 3-diethylamino-6-methyl-7-(3-trifluoromethylanilino) fluoran, 3-diethylamino-6-

methyl-7-(2-chloroanilino) fluoran, 3-diethylamino-6-methyl-7-(4-chloroanilino) fluoran, 3-diethylamino-6-methyl-7-(2-fluoroanilino) fluoran, 3-diethylamino-6-methyl-7-(4-n-octylanilino) fluoran, 3-diethylamino-7-(4-n-octylanilino) fluoran, 3-diethylamino-7-(n-octylamino) fluoran, 3-diethylamino-7-(dibenzylamino) fluoran, 3-diethylamino-6-methyl-7-(dibenzylamino) fluoran, 3-diethylamino-6-chloro-7-methylfluoran, 3-diethylamino-7-t-butylfluoran, 3-diethylamino-7-carboxyethylfluoran, 3-diethylamino-6-chloro-7-anilinofluoran, 3-diethylamino-6-methyl-7-(3-methylanilino) fluoran, 3-diethylamino-6-methyl-7-(4-methylanilino) fluoran, 3-diethylamino-6-ethoxyethyl-7-anilinofluoran, 3-diethylamino-7-methylfluoran, 3-diethylamino-7-chlorofluoran, 3-diethylamino-7-(3-trifluoromethylanilino) fluoran, 3-diethylamino-7-(2-chloroanilino) fluoran, 3-diethylamino-7-(2-fluoroanilino) fluoran, 3-diethylamino-benzo[a] fluoran, 3-diethylamino-benzo[c] fluoran, 3-dibutylamino-7-dibenzylaminofluoran, 3-dibutylamino-7-anilinofluoran, 3-diethylamino-7-anilinofluoran, 3-dibutylamino-6-methyl fluoran, 3-dibutylamino-6-methyl-7-anilinofluoran, 3-dibutylamino-6-methyl-7-(2,4-dimethylanilino) fluoran, 3-dibutylamino-6-methyl-7-(2-chloroanilino) fluoran, 3-dibutylamino-6-methyl-7-(4-chloroanilino) fluoran, 3-dibutylamino-6-methyl-7-(2-fluoroanilino) fluoran, 3-dibutylamino-6-methyl-7-(3-trifluoromethylanilino) fluoran, 3-dibutylamino-6-ethoxyethyl-7-anilinofluoran, 3-dibutylamino-6-chloro-anilinofluoran, 3-dibutylamino-6-methyl-7-(4-methylanilino) fluoran, 3-dibutylamino-7-(2-chloroanilino) fluoran, 3-dibutylamino-7-(2-fluoroanilino) fluoran, 3-dibutylamino-7-(N-methyl-N-formylamino) fluoran, 3-dipentylamino-6-methyl-7-anilinofluoran, 3-dipentylamino-6-methyl-7-(4-2-chloroanilino) fluoran, 3-dipentylamino-7-(3-trifluoromethylanilino) fluoran, 3-dipentylamino-6-chloro-7-anilinofluoran, 3-dipentylamino-7-(4-chloroanilino) fluoran, 3-pyrrolidino-6-methyl-7-anilinofluoran, 3-piperidino-6-methyl-7-anilinofluoran, 3-(N-methyl-N-propylamino)-6-methyl-7-anilinofluoran, 3-(N-methyl-N-cyclohexylamino)-6-methyl-7-anilinofluoran, 3-(N-ethyl-N-cyclohexylamino)-6-methyl-7-anilinofluoran, 3-(N-ethyl-p-toluidino)-6-methyl-7-anilinofluoran, 3-(N-ethyl-N-isoamylamino)-6-methyl-7-anilinofluoran, 3-(N-ethyl-N-isoamylamino)-6-chloro-7-anilinofluoran, 3-(N-ethyl-N-tetrahydrofurfurylamino)-6-methyl-7-anilinofluoran, 3-(N-ethyl-N-isobutylamino)-6-methyl-7-anilinofluoran, 3-(N-butyl-N-isoamylamino)-6-methyl-7-anilinofluoran, 3-(N-isopropyl-N-3-pentylamino)-6-methyl-7-anilinofluoran, 3-(N-ethyl-N-ethoxypropylamino)-6-methyl-7-anilinofluoran, 3-cyclohexylamino-6-chlorofluoran, 2-methyl-6-p-(p-dimethylaminophenyl)aminoanilinofluoran, 2-methoxy-6-p-(p-dimethylaminophenyl)aminoanilinofluoran, 2-chloro-3-methyl-6-p-(p-phenylaminophenyl)aminoanilinofluoran, 2-diethylamino-6-p-(p-dimethylaminophenyl)aminoanilinofluoran, 2-phenyl-6-methyl-6-p-(p-phenylaminophenyl)aminoanilinofluoran, 2-benzyl-6-p-(p-

phenylaminophenyl)aminoanilino-fluoran, 3-methyl-6-p-(p-dimethylaminophenyl)amino-anilino-fluoran, 3-diethylamino-6-p-(p-diethylaminophenyl)aminoanilino-fluoran, 3-diethyl-amino-6-p-(p-dibutylaminophenyl)aminoanilino-fluoran, 2,4-dimethyl-6-[(4-dimethylamino)-anilino] fluoran, 3-[(4-dimethylaminophenyl)amino]-5,7-dimethylfluoran, 3,6,6'-tris(dimethyl-amino)spiro[fluorene-9,3'-phthalide], 3,6,6'-tris(diethylamino)spiro[fluorene-9,3'-phthalide], 3,3-bis(p-dimethylaminophenyl)-6-dimethylaminophthalide, 3,3-bis(p-dimethylamino-phenyl)phthalide, 3,3-bis-[2-(p-dimethylaminophenyl)-2-(p-methoxyphenyl)ethenyl]-4,5,6,7-tetrabromophthalide, 3,3-bis-[2-(p-dimethylaminophenyl)-2-(p-methoxyphenyl)ethenyl]-4,5,6,7-tetrachlorophthalide, 3,3-bis[1,1-bis(4-pyrrolidinophenyl)ethylene-2-yl]-4,5,6,7-tetrabromophthalide, 3,3-bis-[1-(4-methoxyphenyl)-1-(4-pyrridinophenyl)ethylene-2-yl]-4,5,6,7-tetrachlorophthalide, 3-(4-diethylamino-2-ethoxyphenyl)-3-(1-ethyl-2-methylindole-3-yl)-4-azaphthalide, 3-(4-diethylamino-2-ethoxyphenyl)-3-(1-octyl-2-methylindole-3-yl)-4-azaphthalide, 3-(4-cyclohexylethylamino-2-methoxyphenyl)-3-(1-ethyl-2-methylindole-3-yl)-4-azaphthalide, 3,3-bis(1-ethyl-2-methylindole-3-yl) phthalide, 3,3-bis(1-octyl-2-methylindole-3-yl) phthalide, mixture of 2-phenyl-4-(4-diethylaminophenyl)-4-(4-methoxyphenyl)-6-methyl-7-dimethylamino-3,1-benzoxazine and 2-phenyl-4-(4-diethylaminophenyl)-4-(4-methoxyphenyl)-8-methyl-7-dimethylamino-3,1-benzoxazine, 4,4'-[1-methylethylidene]-bis(4,1-phenyleneoxy-4,2-quinazolinediyl)]bis[N,N-diethylbenzenamine], bis(N-methyldiphenylamine)-4-yl-(N-butylcarbazole)-3-yl-methane and mixtures thereof.

All of the above colour forming compounds can be used singly or as a mixture with other colour forming compounds; or they may also be used together with further black colour forming compounds.

Highly preferred are 3-diethylamino-6-methyl-7-anilino-fluoran, 3-diethylamino-6-methyl-7-(3-methylanilino) fluoran, 3-diethylamino-6-methyl-7-(2,4-dimethylanilino) fluoran, 3-dibutylamino-6-methyl-7-anilino-fluoran, 3-dipentylamino-6-methyl-7-anilino-fluoran, 3-(N-methyl-N-propylamino)-6-methyl-7-anilino-fluoran, 3-(N-methyl-N-cyclohexylamino)-6-methyl-7-anilino-fluoran, 3-(N-ethyl-N-isoamylamino)-6-methyl-7-anilino-fluoran, 3-diethylamino-6-chloro-7-anilino-fluoran, 3-dibutylamino-7-(2-chloroanilino)fluoran, 3-N-ethyl-p-toluidino-6-methyl-7-anilino-fluoran, 3-(N-ethyl-N-tetrahydrofurfurylamino)-6-methyl-7-anilino-fluoran, 3-(N-ethyl-N-isobutylamino)-6-methyl-7-anilino-fluoran, 3-N-ethyl-N-ethoxypropylamino-6-methyl-7-anilino-fluoran, 2,4-dimethyl-6-[(4-dimethylamino)anilino]fluoran, 3-(4-diethylamino-2-ethoxyphenyl)-3-(1-octyl-2-methylindole-3-yl)-4-azaphthalide, 3,3-bis(p-dimethylamino-phenyl)-6-dimethylaminophthalide and mixtures thereof.

It is also possible to use solid solutions comprising at least two colour forming compounds.

A monophase (or single-phase or guest-host) solid solution possesses a crystal lattice which is identical with the crystal lattice of one of its components. One component is embedded as the 'guest' in the crystal lattice of the other component, which acts as the 'host'. The X-ray diffraction pattern of such a monophase solid solution is substantially identical to that of one of the components, called the 'host'. Within certain limits, different proportions of the components produce almost identical results.

In the literature, the definitions by the various authors, such as, G.H.Van't Hoff, A.I.Kitaigorodsky and A.Whitacker for solid solutions and mixed crystals are often contradictory, (cf, e.g. 'Analytical Chemistry of Synthetic Dyes', Chapter 10/page 269, Editor K.Venkataraman, J.Wiley, New York, 1977).

The term 'monophase solid solution' or 'multiphase solid solution' or mixed crystal', as defined herein, therefore, should be taken from the following definitions, which have been adapted to the current improved state of knowledge of such systems:

A monophase (or single-phase or guest-host) solid solution possesses a crystal lattice which is identical with the crystal lattice of one of its components. One component is embedded as the 'guest' in the crystal lattice of the other component, which acts as the 'host'. The X-ray diffraction pattern of such a monophase solid solution is substantially identical to that of one of the components, called the 'host'. Within certain limits, different proportions of the components produce almost identical results.

A multiphase solid solution possesses no precise, uniform crystal lattice. It differs from a physical mixture of its components in that the crystal lattice of at least one of its components is partially or completely altered. In comparison to a physical mixture of the components, which gives an X-ray diffraction diagram that is additive of the diagrams seen for the individual components. The signals in the X-ray diffraction diagram of a multiphase solid solution are broadened, shifted or altered in intensity. In general, different proportions of the components produce different results.

A mixed crystal (or solid compound type) solid solution possesses a precise composition and a uniform crystal lattice, which is different from the crystal lattices of all its components. If

different proportions of the components lead, within certain limits, to the same result, then a solid solution is present in which the mixed crystal acts as a host.

For the avoidance of doubt it may also be pointed out that, inter alia, there may also be amorphous structures and mixed aggregates consisting of different particles of different physical type, such as, for example, an aggregate of different components each in pure crystal modification. Such amorphous structures and mixed aggregates cannot be equated with either solid solutions or mixed crystals, and possess different fundamental properties.

As hereinbefore detailed, the monophase solid solutions comprise a plurality of colour compounds. Suitable colour forming materials which may be included in the solid solutions are those given above.

Of particular interest are the following monophase solid solutions:

3-dibutylamino-6-methyl-7-anilino-fluoran and 3-dibutylamino-7-dibenzylamino-fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-dibutylamino-7-anilino-fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-diethylamino-7-anilino-fluoran;
3-diethylamino-6-methyl-7-anilino-fluoran and 3-diethylamino-7-anilino-fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-diethylamino-6-methyl-7-anilino-fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-N-isoamyl-N-ethylamino-6-methyl-7-anilino-fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-N-2-pentyl-N-ethylamino-6-methyl-7-anilino-fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-N-isopropyl-N-ethylamino-6-methyl-7-anilino-fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-N-Cyclohexylmethyl-N-ethylamino-6-methyl-7-anilino-fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-dipropylamino-6-methyl-7-anilino-fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-N-2-butyl-N-ethylamino-6-methyl-7-anilino-fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-N-cyclohexyl-N-methylamino-6-methyl-7-anilino-fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-diethylamino-6-methyl-7-(3-methylanilino)-fluoran;

3-dibutylamino-6-methyl-7-anilino-fluoran and 3-diethylamino-6-methyl-7-(2,4-dimethylanilino)fluoran;

3-dibutylamino-6-methyl-7-anilino-fluoran and 3-dipentylamino-6-methyl-7-anilino-fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-(N-methyl-N-propylamino)-6-methyl-7-anilino-fluoran;

3-dibutylamino-6-methyl-7-anilino-fluoran and 3-diethylamino-6-chloro-7-anilino-fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-dibutylamino-7-(2-chloroanilino)fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-N-ethyl-p-toluidino-6-methyl-7-anilino-fluoran;
3-dibutylamino-6-methyl-7-anilino-fluoran and 3-(N-ethyl-N-tetrahydrofurfurylamino)-6-methyl-7-anilino-fluoran;

3-dibutylamino-6-methyl-7-anilino-fluoran and 3-(N-ethyl-N-isobutylamino)-6-methyl-7-anilino-fluoran;

3-dibutylamino-6-methyl-7-anilino-fluoran and 3-N-ethyl-N-ethoxypropylamino-6-methyl-7-anilino-fluoran;

3-dibutylamino-6-methyl-7-anilino-fluoran and 2,4-dimethyl-6-[(4-dimethylamino)anilino]fluoran

3-N-isoamyl-N-ethylamino-6-methyl-7-anilino-fluoran and 3-diethylamino-6-methyl-7-anilino-fluoran;

3-diethylamino-6-methyl-7-anilino-fluoran and 3-N-propyl-N-methylamino-6-methyl-7-anilino-fluoran;

3-diethylamino-6-methyl-7-(3-tolyl)aminofluoran and 3-diethylamino-6-methyl-7-anilino-fluoran;

3-dibutylamino-6-methyl-7-anilino-fluoran and 3,3-bis(1-octyl-2-methylindol-3-yl)phthalide;

3-dibutylamino-6-methyl-7-anilino-fluoran and mixture of 2-phenyl-4-(4-diethylaminophenyl)-4-(4-methoxyphenyl)-6-methyl-7-dimethylamino-3,1-benzoxazine and 2-phenyl-4-(4-diethylaminophenyl)-4-(4-methoxyphenyl)-8-methyl-7-dimethylamino-3,1-benzoxazine;

3-dibutylamino-6-methyl-7-anilino-fluoran and 4,4'-[1-methylethylidene]bis(4,1-phenyleneoxy-4,2-quinazolinediyl)]bis[N,N-diethylbenzenamine].

In the above monophasic solid solutions the first compound is in a molar ratio of 75 to 99.9% by mole, the second compound is in a ratio of 25 to 0.1% by mole.

Examples of monophasic solid solutions comprising two components A and B in the stated ratios are: 3-dibutylamino-6-methyl-7-anilino-fluoran (99.9%), 3-diethylamino-6-methyl-7-anilino-fluoran (0.1%);

3-dibutylamino-6-methyl-7-anilino-fluoran (99%), 3-diethylamino-6-methyl-7-anilino-fluoran (1%);

3-dibutylamino-6-methyl-7-anilino-fluoran (95%), 3-diethylamino-6-methyl-7-anilino-fluoran (5%);

3-dibutylamino-6-methyl-7-anilino-fluoran (90%) and 3-N-2-pentyl-N-ethylamino-6-methyl-7-anilino-fluoran (10%);

3-dibutylamino-6-methyl-7-anilino-fluoran (95%) and 3-N-2-pentyl-N-ethylamino-6-methyl-7-anilino-fluoran (5%);

3-dibutylamino-6-methyl-7-anilino-fluoran (90%) and 3-N-isopropyl-N-ethylamino-6-methyl-7-anilino-fluoran (10%);

3-dibutylamino-6-methyl-7-anilino-fluoran (95%) and 3-N-isopropyl-N-ethylamino-6-methyl-7-anilino-fluoran (5%);

3-dibutylamino-6-methyl-7-anilino-fluoran (90%) and 3-N-Cyclohexylmethyl-N-ethylamino-6-methyl-7-anilino-fluoran (10%);

3-dibutylamino-6-methyl-7-anilino-fluoran (95%) and 3-N-Cyclohexylmethyl-N-ethylamino-6-methyl-7-anilino-fluoran (5%);

3-dibutylamino-6-methyl-7-anilino-fluoran (90%) and 3-dipropylamino-6-methyl-7-anilino-fluoran (10%);

3-dibutylamino-6-methyl-7-anilino-fluoran (95%) and 3-dipropylamino-6-methyl-7-anilino-fluoran (5%);

3-dibutylamino-6-methyl-7-anilino-fluoran (90%) and 3-N-2-butyl-N-ethylamino-6-methyl-7-anilino-fluoran (10%);

3-dibutylamino-6-methyl-7-anilino-fluoran (95%) and 3-N-2-butyl-N-ethylamino-6-methyl-7-anilino-fluoran (5%);

3-dibutylamino-6-methyl-7-anilino-fluoran (90%), 3-diethylamino-6-methyl-7-anilino-fluoran (10%);

3-dibutylamino-6-methyl-7-anilino-fluoran (85%), 3-diethylamino-6-methyl-7-anilino-fluoran (15%);

3-dibutylamino-6-methyl-7-anilino-fluoran (80%), 3-diethylamino-6-methyl-7-anilino-fluoran (20%);

3-dibutylamino-6-methyl-7-anilino-fluoran (95%), 3-N-isoamyl-N-ethylamino-6-methyl-7-anilino-fluoran (5%);

3-dibutylamino-6-methyl-7-anilino-fluoran (90%), 3-N-isoamyl-N-ethylamino-6-methyl-7-anilino-fluoran (10%);

- 14 -

3-dibutylamino-6-methyl-7-anilino-fluoran (80%), 3-N-isoamyl-N-ethylamino-6-methyl-7-anilino-fluoran (20%);

3-dibutylamino-6-methyl-7-anilino-fluoran (90%), 3-N-cyclohexyl-N-methylamino-6-methyl-7-anilino-fluoran (10%);

3-diethylamino-6-methyl-7-anilino-fluoran (90%), 3-N-isoamyl-N-ethylamino-6-methyl-7-anilino-fluoran (10%);

3-diethylamino-6-methyl-7-anilino-fluoran (80%), 3-N-isoamyl-N-ethylamino-6-methyl-7-anilino-fluoran (20%);

3-diethylamino-6-methyl-7-anilino-fluoran (20%), 3-N-isoamyl-N-ethylamino-6-methyl-7-anilino-fluoran (80%);

3-diethylamino-6-methyl-7-anilino-fluoran (10%), 3-N-isoamyl-N-ethylamino-6-methyl-7-anilino-fluoran (90%);

3-diethylamino-6-methyl-7-anilino-fluoran (90%), 3-N-propyl-N-methylamino-6-methyl-7-anilino-fluoran (10%);

3-diethylamino-6-methyl-7-anilino-fluoran (80%), 3-N-propyl-N-methylamino-6-methyl-7-anilino-fluoran (20%);

3-diethylamino-6-methyl-7-anilino-fluoran (20%), 3-N-propyl-N-methylamino-6-methyl-7-anilino-fluoran (80%);

3-diethylamino-6-methyl-7-anilino-fluoran (10%), 3-N-propyl-N-methylamino-6-methyl-7-anilino-fluoran (90%);

3-diethylamino-6-methyl-7-anilino-fluoran (10%), 3-diethylamino-6-methyl-7-(3-tolyl)amino-fluoran (90%);

3-diethylamino-6-methyl-7-anilino-fluoran (20%), 3-diethylamino-6-methyl-7-(3-tolyl)amino-fluoran (80%);

3-dibutylamino-6-methyl-7-anilino-fluoran (90%), 3,3-bis(1-octyl-2-methylindol-3-yl)phthalide (10%);

3-dibutylamino-6-methyl-7-anilino-fluoran (80%), 3,3-bis(1-octyl-2-methylindol-3-yl)phthalide (20%);

3-dibutylamino-6-methyl-7-anilino-fluoran (90%), mixture of 2-phenyl-4-(4-diethylaminophenyl)-4-(4-methoxyphenyl)-6-methyl-7-dimethylamino-3,1-benzoxazine and 2-phenyl-4-(4-diethylaminophenyl)-4-(4-methoxyphenyl)-8-methyl-7-dimethylamino-3,1-benzoxazine (10%);

3-dibutylamino-6-methyl-7-anilino-fluoran (80%), mixture of 2-phenyl-4-(4-diethylaminophenyl)-4-(4-methoxyphenyl)-6-methyl-7-dimethylamino-3,1-benzoxazine and 2-

phenyl-4-(4-diethylaminophenyl)-4-(4-methoxyphenyl)-8-methyl-7-dimethylamino-3,1-benzoxazine(20%);

3-dibutylamino-6-methyl-7-anilino-fluoran (90%), 4,4'-[1-methylethylidene]bis(4,1-phenyleneoxy-4,2-quinazolinediyl)]bis[N,N-diethylbenzenamine](10%);

3-dibutylamino-6-methyl-7-anilino-fluoran (80%), 4,4'-[1-methylethylidene]bis(4,1-phenyleneoxy-4,2-quinazolinediyl)]bis[N,N-diethylbenzenamine] (20%).

The monophase solid solutions can be used singly or as a mixture with other colour forming compounds such as triphenylmethanes, lactones, fluorans, benzoxazines and spiropyrans; or they may also be used together with further black colour forming compounds. Examples of such other colour forming compounds are given hereinbefore.

The monophase solid solutions can be prepared by a variety of methods. One such method is the recrystallisation method wherein a physical mixture of the desired components is dissolved, with or without heating, in a suitable solvent or solvent mixture. Suitable solvents include but are not limited to toluene, benzene, xylene, dichlorobenzene, chlorobenzene, 1,2-dichloroethane, methanol, ethanol, iso-propanol, n-butanol, acetonitrile, dimethylformamide or mixtures of these solvents with each other and with water. The monophase solid solution is then isolated by crystallisation from the solvent or solvent mixture. This can be brought about by cooling, standing, addition of a further solvent to promote crystallisation or concentration by standard means such as distillation, steam distillation and vacuum distillation. When the monophase solid solution is isolated by concentration it may be advantageous to do so in the presence of a small amount of base, to improve the visual aspect of the isolated product.


Alternatively, monophase solid solutions can be prepared from mixtures of the appropriate starting materials. The technique can be used to produce mixtures of two or more fluorans or phthalides. For example, mixtures of two fluorans are produced by replacing a single starting material with two analogous materials to the same total molar concentration in the reaction. In the case of fluorans, these starting materials are derivatives of amino phenols, phthalic anhydrides, keto acids and diphenylamines.

In addition, the heat sensitive recording material can contain a previously known developer, unless the colour forming performance of the resultant heat sensitive material is disturbed thereby. Such developers are exemplified by but not limited to; 4,4'-isopropylidene

bisphenol, 4,4'-sec-butylidene bisphenol, 4,4'-cyclohexylidene bisphenol, 2,2-bis-(4-hydroxyphenyl)-4-methylpentane, 2,2-dimethyl-3,3-di(4-hydroxyphenyl)butane, 2,2'-dihydroxydiphenyl, 1-phenyl-1,1-bis(4-hydroxyphenyl)butane, 4-phenyl-2,2-bis(4-hydroxyphenyl)butane, 1-phenyl-2,2-bis(4-hydroxyphenyl)butane, 2,2-bis(4'-hydroxy-3'-methylphenyl)-4-methylpentane, 2,2-bis(4'-hydroxy-3'-tert-butylphenyl)-4-methylpentane, 4,4'-sec-butylidene-bis (2-methylphenol), 4,4'-isopropylidene-bis (2-tert-butylphenol), 2,2-bis(4'-hydroxy-3'-isopropylphenyl)-4-methylpentane, allyl-4,4-bis (4'-hydroxyphenyl) pentanoate, propargyl-4,4-bis(4'-hydroxyphenyl) pentanoate, n-propyl-4,4-bis (4'-hydroxyphenyl) pentanoate, 2,4-bis (phenylsulfonyl) phenol, 2-(4-methylsulfonyl)-4-(phenylsulfonyl) phenol, 2-(phenylsulfonyl)-4-(4-methylsulfonyl) phenol, 2,4-bis (4-methylphenylsulfonyl) phenol, pentamethylene-bis(4-hydroxybenzoate), 2,2-dimethyl-3,3-di(4-hydroxyphenyl)pentane, 2,2-di(4-hydroxyphenyl)hexane, 4,4'-dihydroxydiphenyl thioether, 1,7-di(4-hydroxyphenylthio)-3,5-dioxahexane, 2,2'-bis(4-hydroxyphenylthio)diethyl ether, 4,4'-dihydroxy-3,3'-dimethylphenyl thioether; benzyl-4-hydroxybenzoate, ethyl-4-hydroxybenzoate, propyl-4-hydroxybenzoate, isopropyl-4-hydroxybenzoate, butyl-4-hydroxybenzoate, isobutyl-4-hydroxybenzoate, 4,4'-dihydroxydiphenyl sulfone, 2,4'-dihydroxydiphenyl sulfone, 4-hydroxy-4'-methyldiphenyl sulfone, 4-hydroxy-4'-isopropoxydiphenyl sulfone, 4-hydroxy-4'-butoxydiphenyl sulfone, 4,4'-dihydroxy-3,3'-diallyldiphenyl sulfone, 3,4-dihydroxy-4'-methyldiphenyl sulfone, 4,4'-dihydroxy-3,3',5,5'-tetrabromodiphenyl sulfone, 4,4'-bis (p-toluenesulphonylaminocarbonylamino) diphenylmethane, N-p-toluenesulphonyl-N'-phenyl urea, dimethyl 4-hydroxyphthalate, dicyclohexyl 4-hydroxyphthalate, diphenyl 4-hydroxyphthalate, 4-[2-(4-methoxyphenoxy)ethoxy] salicylate, 3,5-di-tert-butylsalicylic acid, 3-benzyl salicylic acid, 3-(α -methylbenzyl) salicylic acid, 3-phenyl-5-(α,α -dimethylbenzyl) salicylic acid, 3,5-di- α -methylbenzyl salicylic acid; metal salts of salicylic acid, 2-benzylsulfonylbenzoic acid, 3-cyclohexyl-4-hydroxybenzoic acid, zinc benzoate, zinc 4-nitrobenzoate, 4-(4'-phenoxybutoxy)phthalic acid, 4-(2'-phenoxyethoxy)phthalic acid, 4-(3'-phenylpropyloxy)phthalic acid, mono (2-hydroxyethyl) -5-nitro-isophthalic acid, 5-benzoyloxycarbonyl isophthalic acid, 5-(1'-phenylethanesulfonyl) isophthalic acid, bis(1,2-dihydro-1,5-dimethyl-2-phenyl-3H-pyrazol-3-one-O)bis(thiocyanato-N) zinc and mixtures thereof.

In addition, the heat sensitive recording material of the invention can contain a sensitiser.

Representative examples of sensitiser are stearamide, methylol stearamide, p-benzylbiphenyl, m-terphenyl, 2-benzyloxynaphthalene, 4-methoxybiphenyl, dibenzyl oxalate, di(4-methylbenzyl) oxalate, di(4-chlorobenzyl) oxalate, dimethyl phthalate, dibenzyl terephthalate, dibenzyl isophthalate, 1,2-diphenoxyethane, 1,2-bis(4-methylphenoxy) ethane, 1,2-bis(3-methylphenoxy) ethane, 4,4'-dimethylbiphenyl, phenyl-1-hydroxy-2-naphthoate, 4-methylphenyl biphenyl ether, 1,2-bis(3,4-dimethylphenyl) ethane, 2,3,5,6-4'-methyldiphenyl methane, 1,4-diethoxynaphthalene, 1,4-diacetoxybenzene, 1,4-dipropionoxybenzene, o-xylene-bis(phenyl ether), 4-(m-methylphenoxy) methyl biphenyl, p-hydroxyacetanilide, p-hydroxybutyranilide, p-hydroxynonanilide, p-hydroxylauranilide, p-hydroxyoctadecanilide, N-phenyl-phenylsulphonamide and sensitisers of the formula



(3),

wherein R and R' are identical or different from each other and each represent C₁-C₆alkyl.

Examples of R and R' are methyl, ethyl, n- or iso-propyl and n-, sec- or tert-butyl.

The substituents R and R' are identical or different from each other and each are preferably C₁-C₄alkyl, especially methyl or ethyl, in particular ethyl.

The above sensitisers are known or can be prepared according to known methods.

In addition, the heat sensitive recording material of the invention can contain a stabiliser.

Representative stabilisers for use in heat sensitive recording materials include 2,2'-methylene-bis(4-methyl-6-tert-butylphenol), 2,2'-methylene-bis(4-ethyl-6-tert-butylphenol), 4,4'-butylidene-bis(3-methyl-6-tert-butylphenol), 4,4'-thio-bis(2-tert-butyl-5-methylphenol), 1,1,3-tris(2-methyl-4-hydroxy-5-tert-butylphenyl) butane, 1,1,3-tris(2-methyl-4-hydroxy-5-cyclohexylphenyl) butane, bis (3-tert-butyl-4-hydroxy-6-methylphenyl) sulfone, bis (3,5-

dibromo-4-hydroxyphenyl) sulfone, 4,4'-sulfinyl bis (2-tert-butyl-5-methylphenol), 2,2'-methylene bis (4,6-di-tert-butylphenyl) phosphate and alkali metal, ammonium and polyvalent metal salts thereof, 4-benzyloxy-4'-(2-methylglycidyoxy) diphenyl sulfone, 4,4'-diglycidyloxydiphenyl sulfone, 1,4-diglycidyloxybenzene, 4-[α -(hydroxymethyl)benzyloxy]-4-hydroxydiphenyl sulfone, metal salts of p-nitrobenzoic acid, metal salts of phthalic acid mono benzyl ester, metal salts of cinnamic acid and mixtures thereof.

Preferred stabilisers are 4,4'-butylidene-bis(3-methyl-6-tert-butylphenol), 4,4'-thio-bis(2-tert-butyl-5-methylphenol), 1,1,3-tris(2-methyl-4-hydroxy-5-tert-butylphenyl) butane, 1,1,3-tris(2-methyl-4-hydroxy-5-cyclohexylphenyl) butane, 4-benzyloxy-4'-(2-methylglycidyoxy) diphenyl sulfone and mixtures thereof.

The heat sensitive recording material of the invention can be prepared according to conventional methods. For example, at least one colour forming compound, at least one developer and, if desired, at least one sensitiser are pulverised separately in water or a suitable dispersing medium, such as aqueous polyvinyl alcohol, to form an aqueous or other dispersion. If desired a stabiliser is treated in the same manner. The fine particle dispersions thus obtained are combined and then mixed with conventional amounts of binder, filler and lubricant.

Representative binders used for the heat sensitive recording material include polyvinyl alcohol (fully and partially hydrolysed), carboxy, amide, sulfonic and butyral modified polyvinyl alcohols, derivatives of cellulose such as hydroxyethyl cellulose, methyl cellulose, ethyl cellulose, carboxymethyl cellulose and acetyl cellulose, copolymer of styrene-maleic anhydride, copolymer of styrene-butadiene, polyvinyl chloride, polyvinyl acetate, polyacrylamide, polyamide resin and mixtures thereof.

Exemplary fillers which can be used include calcium carbonate, kaolin, calcined kaolin, aluminium hydroxide, talc, titanium dioxide, zinc oxide, silica, polystyrene resin, urea-formaldehyde resin, hollow plastic pigment and mixtures thereof.

Representative lubricants for use in heat sensitive recording materials include dispersions or emulsions of stearamide, methylene bisstearamide, polyethylene, carnauba wax, paraffin wax, zinc stearate or calcium stearate and mixtures thereof.

Other additives can also be employed, if necessary. Such additives are for example fluorescent whitening agents and ultraviolet absorbers.

The coating composition so obtained can be applied to a suitable substrate such as paper, plastic sheet and resin coated paper, and used as the heat sensitive recording material. The system of the invention can be employed for other end use applications using colour forming materials, for example, a temperature indicating material.

The quantity of the coating is usually in the range of 2 to 10 g/m², most often in the range 4 to 8g/m².

The recording material containing such a thermosensitive colouring layer can in addition contain a protective layer and, if desired, an undercoat layer. The undercoat layer may be interposed between the substrate and the thermosensitive colouring layer.

The protective layer usually comprises a water-soluble resin in order to protect the thermosensitive colouring layer. If desired, the protective layer may contain water-soluble resins in combination with water-insoluble resins.

As such resins conventional resins can be employed. Specific examples are: polyvinyl alcohol; starch and starch derivatives; cellulose derivatives such as methoxycellulose, hydroxyethylcellulose, carboxymethylcellulose, methylcellulose and ethylcellulose; sodium polyacrylate; polyvinyl pyrrolidone; polyacrylamide/acrylic acid ester copolymers; acrylamide/acrylic acid ester/methacrylic acid copolymers; alkali metal salts of styrene/maleic anhydride copolymers; alkali metal salts of isobutylene/maleic anhydride copolymers; polyacrylamide; sodium alginate; gelatin; casein; water-soluble polyesters and carboxyl-group-modified polyvinyl alcohols.

The protective layer may also contain a water-resisting agent such as a polyamide resin, melamine resin, formaldehyde, glyoxal or chromium alum.

Furthermore, the protective layer may contain fillers, such as finely-divided inorganic powders, e.g. of calcium carbonate, silica, zinc oxide, titanium oxide, aluminium hydroxide, zinc hydroxide, barium sulphate, clay, talc, surface-treated calcium or silica, or a finely-

divided organic powder of, e.g., a urea-formaldehyde resin, a styrene/methacrylic acid copolymer or polystyrene.

The undercoat layer usually contains as its main components a binder resin and a filler.

Specific examples of binder resins for use in the undercoat layer are:

polyvinyl alcohol; starch and starch derivatives; cellulose derivatives such as methoxycellulose, hydroxyethylcellulose, carboxymethylcellulose, methylcellulose and ethylcellulose; sodium polyacrylate; polyvinyl pyrrolidone; polyacrylamide/acrylic acid ester copolymers; acrylamide/acrylic acid ester/methacrylic acid copolymers; alkali metal salts of styrene/maleic anhydride copolymers; alkali metal salts of isobutylene/maleic anhydride copolymers; polyacrylamide; sodium alginate; gelatin; casein; water-soluble polymers such as water-soluble polyesters and carboxyl-group-modified polyvinyl alcohols; polyvinyl acetate; polyurethanes; styrene/butadiene copolymers; polyacrylic acid; polyacrylic acid esters; vinyl chloride/vinyl acetate copolymers; polybutylmethacrylate; ethylen/vinylacetate copolymers and styrene/butadiene acrylic derivative copolymers.

Specific examples of fillers for use in the undercoat layer are:

finely-divided inorganic powders, e.g. of calcium carbonate, silica, zinc oxide, titanium oxide, aluminium hydroxide, zinc hydroxide, barium sulphate, clay, talc, surface-treated calcium, silica or calcined clay (eg Ansilex, Engelhard Corp.), and finely-divided organic powders of, e.g., urea-formaldehyde resins, styrene/methacrylic acid copolymers and polystyrene.

In addition, the undercoat layer may contain a water-resisting agent. Examples of such agents are given above.

In particular the invention provides exceptional resistance to plasticiser, oil and heat ageing whilst showing an improved background whiteness.

The following non-limiting examples, illustrate the novel materials of the present invention.

Synthesis Example 1

Preparation of N-(p-toluenesulphonyl)-N'-(3-n-butylaminosulphonylphenyl) urea.

To a stirred solution of 4.6g aminobutylbenzenesulphonamide in 10g dimethylformamide at room temperature was added 4.14g toluenesulphonylisocyanate. After three hours at room temperature 0.65g toluenesulphonylisocyanate was added and stirring continued for one hour. To the reaction mixture was added water and methanol to precipitate the product as a white solid which was isolated by filtration and washed with methanol. After drying in vacuo at 80°C the product was obtained in 8.1g yield, melting point 153-153.3°C.

Synthesis Example 2

Preparation of N-(p-toluenesulphonyl)-N'-(4-trimethylacetophenyl) urea.

A mixture of 22.3g 4-nitrophenyltrimethylacetate and 300g of isopropanol was charged to a Buchi catalytic hydrogenator with 2g 5%Pd-C. The mixture was then hydrogenated at 60°C and 10bar until hydrogen uptake ceased. The reaction mixture was cooled, filtered and the solvent removed to yield 18.7g of 4-aminophenyltrimethylacetate as a white solid, melting point 56.2-56.5°C.

The 4-aminophenyltrimethylacetate 15.4g, was then converted to the product using the method described in Example 1 to give 27g of a white solid which was isolated by filtration and washed with isopropanol, melting point 177.8-178.3°C.

Synthesis Example 3

Preparation of N-(benzenesulphonyl)-N'-(3-p-toluenesulphonyloxyphenyl) urea.

To a stirred solution of 5.65g m-aminophenol in 45ml acetonitrile was added dropwise 9.5g benzenesulphonylisocyanate such that the temperature was maintained at <40°C. The mixture was stirred for one hour at room temperature and allowed to stand overnight. To the reaction was then added 25ml water and 5.35g 47% caustic soda and the reaction was heated to 55-60°C. To this was added, over two hours, 9.93g p-toluenesulphonylchloride with simultaneous addition of 47% caustic soda so as to maintain the pH between 10 and 11. After two hours at 60°C the reaction mass was neutralised with hydrochloric acid to produce a thick white precipitate of the desired product. This was isolated by filtration and washed with water to give after drying 21.1g of product, melting point 162-170°C.

Synthesis Example 4

Preparation of N-(p-toluenesulphonyl)-N'-(3-p-toluenesulphonyloxyphenyl) urea.

To a solution of 81.75g m-aminophenol in 77.4g 47% caustic soda and 44.3g water at 65°C was added, dropwise over three hours, 143.7g p-toluenesulphonylchloride. The m-toluenesulphonyloxyaniline precipitated during the course of the addition was isolated by filtration and washed alkaline free with water to give 101.4g of solid.

The m-toluenesulphonyloxyaniline was then converted to the product using the method described in Example 1 to give a white solid with melting point 155-159°C.

Synthesis Example 5

Preparation of N-(p-toluenesulphonyl)-N'-(3-phenylsulphonyloxyphenyl) urea.

A stirred solution of N-toluenesulphonylethylcarbamate (1.21g), 3-phenylsulphonyloxyaniline (1.24g) and triethylamine (0.55g) in acetonitrile (25ml) was heated under reflux for 22 hours. The reaction mass was allowed to cool and diluted with water to precipitate the product as a white solid.

Synthesis Examples 5a to 44

According to the above synthetic methods the N,N' disubstituted ureas given in the following Table 1 can be prepared.

Table 1

Synthesis Example	N	N'	Melting Point (°C)	Synthetic Method according to Example
5a	p-Toluenesulphonyl	3-Phenyl-sulphonyloxyphenyl	149.5-153	4
6	p-Toluenesulphonyl	2-p-Toluene-sulphonyloxyphenyl	149.8-152.5	4
7	p-Toluenesulphonyl	2-Phenyl-sulphonyloxyphenyl	156-160.4	4

- 23 -

Synthesis Example	N	N'	Melting Point (°C)	Synthetic Method according to Example
8	p-Toluenesulphonyl	4-Benzoyloxyphenyl	229-231	2
9	p-Toluenesulphonyl	4-Phenylsulphonyloxyphenyl	161-163	4
10	p-Toluenesulphonyl	4-Acetoxyphenyl	about 200	2
11	p-Toluenesulphonyl	2-p-Toluene-sulphonyloxy-5-ethylsulphonyl phenyl	167-169	4
12	o-Toluenesulphonyl	3-p-Toluene-sulphonyloxyphenyl	178-183	4
13	4-Chlorobenzene sulphonyl	3-p-Toluene-sulphonyloxyphenyl	144-151	4
14	p-Toluenesulphonyl	4-p-Toluene-sulphonyloxyphenyl	190-193	2
15	p-Toluenesulphonyl	3-Butylsulphonyloxyphenyl	158-163	3
16	p-Toluenesulphonyl	2-Methyl-4-p-toluenesulphonyloxyphenyl	176-180	4
17	p-Toluenesulphonyl	5-methyl-3-p-toluenesulphonyloxy-2-pyrimidyl	169-171	4
18	p-Toluenesulphonyl	5-p-Toluene-sulphonyloxynaphthyl	145-148	4
19	p-Toluenesulphonyl	4-p-Tolyloxy-sulphonylphenyl	168-169	3
20	p-Toluenesulphonyl	3-Octylsulphonyloxyphenyl		3
21	p-Toluenesulphonyl	3-Hexadecyl-sulphonyloxyphenyl	153-159	3

Synthesis Example	N	N'	Melting Point (°C)	Synthetic Method according to Example
22	Octylsulphonyl	3-p-Toluene-sulphonyloxyphenyl	118-120	5
23	p-Toluenesulphonyl	4-Phenylsulphonyl oxyphenyl	161-163	4
24	Phenylsulphonyl	3-(p-Toluenesulphonyl oxy)phenyl	149-151.6	4
25	p-Toluenesulphonyl	3-Trimethyl acetoxypheyl		3
26	4-Chlorophenyl sulphonyl	4-(p-Toluenesulphonyl oxy)phenyl	177.8-179	4
27	p-Toluenesulphonyl	4-Acetophenyl	184.5-185.5	1
28	p-Toluenesulphonyl	4-Acetamido sulphonylphenyl	192.8-193.2	1
29	p-Toluenesulphonyl	3-(Ethoxycarbonyl oxy)phenyl	186.8-188	3
30	p-Toluenesulphonyl	3-(Ethoxycarbonyl) phenyl	139.8-141	2
31	p-Toluenesulphonyl	3-(2-naphthyl sulphonyl oxy)phenyl	151.2-152	3
32	p-Toluenesulphonyl	4-Benzoylphenyl	185-187	1
33	p-Toluenesulphonyl	3-(4-toluenesulphonylamin o)phenyl	193.5-195.3	2
34	p-Toluenesulphonyl	3-Acetaminophenyl	192.8-193.7	2
35	4-Chloro phenylsulphonyl	4-Trimethyl acetamidophenyl	187-189.4	2

Synthesis Example	N	N'	Melting Point (°C)	Synthetic Method according to Example
36	Benzenesulphonyl	4-Trimethyl acetamidophenyl	159-167	2
37	4-Chloro phenylsulphonyl	2-(p-Toluenesulphonyl oxy)phenyl	161-164	4
38	p-Toluenesulphonyl	3-(N,N-di-p-Toluene-sulphonyl)amino-phenyl	162.5-165	1
39	Benzenesulphonyl	2-(p-Toluenesulphonyloxy)phenyl	157-160	4
40	4-Chloro phenylsulphonyl	4-Acetamido sulphonylphenyl	187-188	1
41	p-Toluenesulphonyl	3-(Diphenyl phosphinyl)phenyl	140-141.5	3
42	p-Toluenesulphonyl	4-Benzyloxyphenyl	154-155.3	1
43	p-Toluenesulphonyl	3-Benzyloxyphenyl	153.9-155.3	1
44	p-Toluenesulphonyl	3-Phenyloxyphenyl	166.5-168.5	1

Synthesis Example 45

Preparation of a monophasic solid solution from 2'-carboxy-4-dibutylamino-2-hydroxybenzophenone (90mol%) and 2'-carboxy-4-diethylamino-2-hydroxybenzophenone (10mol%).

To 249.5g of 98% sulphuric acid and 61.2g oleum was added, 78.97g of 2'-carboxy-4-dibutylamino-2-hydroxybenzophenone and 7.44g of 2'-carboxy-4-diethylamino-2-hydroxybenzophenone over about 2hr with the temperature being maintained below about 25°C by use of an ice-bath. Once in solution, 50.7g of 4-methoxy-2-methyldiphenylamine

- 26 -

was added and the mixture was stirred for about 3hr at 30°C. The reaction mass was then added, over about 30 minutes with stirring, to a mixture of 135g toluene-45g water at 85°C. To this was then added, over 30 minutes, 135.7g water. Agitation was ceased and the separated aqueous phase was removed. To the remaining organic phase was added 244g sodium hydroxide 100°TW, 199g toluene and 387g water and the reaction was stirred for 2h at 85°C. The reaction was cooled to 25°C and the precipitated product was isolated by filtration. The product was washed with hot water (about 60°C) then methanol and dried to yield 106.2g of a monophasic solid solution (melting point 179.9-181.4°C).

Example 1

Preparation of heat sensitive coating formulations containing N-(p-toluenesulphonyl)-N'-(3-p-toluenesulphonyloxyphenyl) urea.

Dispersions A to C were prepared by grinding the compositions shown below in an attritor until an average particle size of 1-1.5µ was attained.

Dispersion A (Colour Former)

3-dibutylamino-6-methyl-7-anilino-fluoran	3.01 parts
Polyvinyl alcohol (10% aqueous solution)	10.50 parts
Water	6.49 parts

Dispersion B (Colour Developer)

N-(p-toluenesulphonyl)-N'-(3-p-toluenesulphonyloxyphenyl) urea	7.5 parts
Polyvinyl alcohol (10% aqueous solution)	7.5 parts
Water	22.5 parts

Dispersion C (Sensitiser)

parabenzylbiphenyl	10.0 parts
Polyvinyl alcohol (10% aqueous solution)	10.0 parts
Water	20.0 parts

A thermal coating mixture was then prepared by combining together the following components:

- 27 -

	parts by weight
Dispersion A	6.6
Dispersion B	10.0
Dispersion C	6.0
Calcium Carbonate (25% aqueous dispersion)	12.0
Zinc stearate (33% aqueous dispersion)	0.9
Polyvinyl alcohol (10% aqueous solution)	4.5
Tinopal® ABP-X (fluorescent whitening agent)	0.12
Water	2.48

This coating mixture was applied on one side of a base paper weighing 50 g/m² in a coating weight of about 5.0 g/m² and then dried. The resulting sheet was calendered by means of a laboratory calender to produce a recording sheet with excellent background whiteness.

The heat sensitive recording paper obtained demonstrates excellent background whiteness of paper after application of the coating liquid and in storage stability, i.e. resistance to light, heat and moisture, of uncoloured portion of the coated paper and excellent resistance of the image to cottonseed oil, plasticiser, heat, heat and moisture, water. Additionally, the recording paper obtained shows a high dynamic sensitivity.

DESCRIPTION OF TEST METHODS:

Background Whiteness Before and After Ageing:

This test assesses the effects of heat and moisture on unprinted thermal paper.

The whiteness of unprinted paper is measured using a Macbeth 1200 series Densitometer, before and after ageing for one hour at 60°C and 50% R.H.

Dynamic Sensitivity at Various Pulse Widths:

This test assesses the sensitivity and intensity of the image produced on thermal paper.

Ten individual print areas are printed with increased amounts of energy using an Atlantek thermal response tester model 200. The optical density of each image is measured using a Macbeth 1200 series Densitometer.

Lightfastness Tests (120 Hours Exposure):

This test assesses the stability of the thermal paper, including the image, after exposure to sunlight.

An image is produced using an Atlantek thermal response tester model 200. The image including background is placed at a distance of 8cm below 40W fluorescent tubes emitting artificial sunlight (approximately 1200 Lux) for 120 hours. The optical density of the image and background whiteness of the paper are measured before and after exposure with a Macbeth 1200 series Densitometer.

Cottonseed Oil Resistance of Image:

This test assesses the stability of the image when exposed to cottonseed oil.

An image is produced using an Atlantek thermal response tester model 200. Cottonseed oil is then Gravure printed onto the image which is then stored at 40°C for 24 hours. The optical density of the image is measured using a Macbeth 1200 series Densitometer before and after exposure.

Plasticiser Resistance of Image and Background:

This test assesses the stability of the image and background when exposed to PVC containing 20-25% phthalate ester-type plasticiser.

An image is produced using an Atlantek thermal response tester model 200. The image is put into contact with the PVC under 107g cm⁻² pressure for 24 hours at 50°C. The optical density of the image and background are measured using a Macbeth 1200 series Densitometer before and after exposure.

Waterfastness of Image:

This test assesses the stability of the image after immersion in water.

An image is produced using an Atlantek thermal response tester model 200. The image is immersed in de-ionised water at room temperature for 24 hours. The optical density of the image is measured using a Macbeth 1200 series Densitometer before and after immersion.

Heat and Moisture Resistance of Image:

This test assesses the effects of heat and moisture on the image.

An image is produced using an Atlantek thermal response tester model 200. The image is aged at 60°C at 70% R.H. for 24 hours. The optical density of the image is measured using a Macbeth 1200 series Densitometer before and after exposure.

Heat Resistance of Image and Background at 80°C:

This test assesses the effect of heat on both the image and background of thermal paper.

An image is produced using an Atlantek thermal response tester model 200. The image is aged at 80°C for 24 hours. The optical density of the image and background are measured using a Macbeth 1200 series Densitometer before and after exposure.

Static Sensitivity and Background Storage Stability

This test determines the thermal sensitivity of thermal paper.

Thermal paper is exposed to a range of temperatures for a fixed period of 1 second. Twelve separately heated blocks at 50°, 60°, 70°, 75°, 80°, 85°, 90°, 95°, 100°, 110°, 120° and 150°C are applied to the paper to produce an image. The optical density of each image is measured using a Macbeth 1200 series Densitometer.

From the static sensitivity, the temperature at which a density of 0.2 occurs is calculated. This temperature gives an indication of the background storage stability of the paper.

Examples 2 to 48

The following Table 2 shows the colour former/developer/sensitiser combinations that were used in each example. The heat sensitive recording material was prepared by the method described in example 1. In all cases, the heat sensitive recording paper thus obtained demonstrates excellent background whiteness of paper after application of the coating liquid and in storage stability, i.e. resistance to light, heat and moisture, of uncoloured portion of the coated paper and excellent resistance of the image to cottonseed oil, plasticiser, heat, heat and moisture, water.

Table 2

Example	Colour Former	Sensitiser	Developer
2	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 4
3	3-diethylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 4
4	3-(N-ethyl-N-isoamylamino)-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 4
5	3-(N-cyclohexyl-N-methylamino)-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 4
6	3-(N-propyl-N-methylamino)-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 4
7	monophase solid solution of 3-dibutylamino-6-methyl-7-anilino-fluoran (9 parts) and 3-diethylamino-6-methyl-7-anilino-fluoran (1 part)	parabenzylbiphenyl	Synthesis Example 4
8	3-dibutylamino-6-methyl-7-anilino-fluoran	2-Benzoyloxy naphthalene	Synthesis Example 4
9	3-dibutylamino-6-methyl-7-anilino-fluoran	Ethyleneglycolbis-m-tolyether.	Synthesis Example 4

Example	Colour Former	Sensitiser	Developer
10	3-dibutylamino-6-methyl-7-anilino-fluoran	Di-(p-Methylbenzyl) oxalate	Synthesis Example 4
11	3-dibutylamino-6-methyl-7-anilino-fluoran	1,4-dipropionyloxy benzene	Synthesis Example 4
12	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 5
13	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 6
14	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 7
15	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 8
16	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 9
17	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 10
18	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 11
19	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 12
20	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 2
21	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 13
22	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 14
23	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 1

24	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	Synthesis Example 15
25	3-dibutylamino-6-methyl-7-anilino-fluoran (75 parts) and 3-diethylamino-6-methyl-7-anilino-fluoran (25 parts)	parabenzylbiphenyl	Synthesis Example 4
26	3-dibutylamino-6-methyl-7-anilino-fluoran (50 parts) and 3-diethylamino-6-methyl-7-anilino-fluoran (50 parts)	parabenzylbiphenyl	Synthesis Example 4
27	3-dibutylamino-6-methyl-7-anilino-fluoran (25 parts) and 3-diethylamino-6-methyl-7-anilino-fluoran (75 parts)	parabenzylbiphenyl	Synthesis Example 4
28	3-dibutylamino-6-methyl-7-anilino-fluoran	1,4-dipropionyloxy benzene	Synthesis Example 5a
29	3-dibutylamino-6-methyl-7-anilino-fluoran	none	Synthesis Example 4
30	3-dibutylamino-6-methyl-7-anilino-fluoran	1,2-Bis(3,4-dimethylphenyl) ethane	Synthesis Example 4
31	3-dibutylamino-6-methyl-7-anilino-fluoran	1,2-Diphenoxyethane	Synthesis Example 4
32	3-dipentylamino-6-methyl-7-anilino-fluoran	Di-(p-Methylbenzyl) oxalate	Synthesis Example 4
33	3-(N-ethyl-N-isoamylamino)-6-methyl-7-anilino-fluoran	1,2-Diphenoxyethane	Synthesis Example 4
34	3-(N-ethyl-N-isoamylamino)-6-methyl-7-anilino-fluoran	Di-(p-Methylbenzyl) oxalate	Synthesis Example 4
35	3-(N-propyl-N-methylamino)-6-methyl-7-anilino-fluoran	2-Benzyloxy naphthalene	Synthesis Example 4

36	3-dibutylamino-6-methyl-7-anilino-fluoran	p-Tolylbiphenyl ether	Synthesis Example 4
37	3-(N-ethyl-N-isoamylamino)-6-methyl-7-anilino-fluoran	2-Benzyloxy naphthalene	Synthesis Example 4
38	3-dibutylamino-6-methyl-7-anilino-fluoran	parabenzylbiphenyl	*
39	3-dibutylamino-6-methyl-7-anilino-fluoran	2-Benzyloxy naphthalene	*
40	3-(N-ethyl-N-isoamylamino)-6-methyl-7-anilino-fluoran	2-Benzyloxy naphthalene	*
41	3-dipentylamino-6-methyl-7-anilino-fluoran	Di-(p-Methylbenzyl) oxalate	*
42	3-(4-diethylamino-2-ethoxyphenyl)-3-(1-octyl-2-methylindole-3-yl)-4-azaphthalide	Di-(p-Methylbenzyl) oxalate	*
43	3-(4-diethylamino-2-ethoxyphenyl)-3-(1-octyl-2-methylindole-3-yl)-4-azaphthalide	parabenzylbiphenyl	4
44	3-(4-diethylamino-2-ethoxyphenyl)-3-(1-octyl-2-methylindole-3-yl)-4-azaphthalide	1,2-Diphenoxyethane	4
45	3-(4-diethylamino-2-ethoxyphenyl)-3-(1-octyl-2-methylindole-3-yl)-4-azaphthalide	Ethyleneglycolbis-m-tolylether	4
46	3-(4-diethylamino-2-ethoxyphenyl)-3-(1-octyl-2-methylindole-3-yl)-4-azaphthalide	Di-(p-Methylbenzyl) oxalate	4
47	3,3-bis(p-dimethylaminophenyl)-6-dimethylaminophthalide	parabenzylbiphenyl	4
48	3-dibutylamino-6-methyl-7-anilino-fluoran	N-phenyl phenyl sulphonamide	4

* Developer used in conjunction with a stabiliser, formulation described below;

- 34 -

Example 49

Preparation of heat sensitive coating formulations containing N-(p-toluenesulphonyl)-N'-(3-p-toluenesulphonyloxyphenyl) urea and a stabiliser.

Dispersions A to D were prepared by grinding the compositions shown below in an attritor until an average particle size of 1-1.5 μ was attained.

Dispersion A (Colour Former)

3-dibutylamino-6-methyl-7-anilino-fluoran	3.01 parts
Polyvinyl alcohol (10% aqueous solution)	10.50 parts
Water	6.49 parts

Dispersion B (Colour Developer)

N-(p-toluenesulphonyl)-N'-

(3-p-toluenesulphonyloxyphenyl) urea	7.5 parts
Polyvinyl alcohol (10% aqueous solution)	7.5 parts
Water	22.5 parts

Dispersion C (Sensitiser)

parabenzylbiphenyl	10.0 parts
Polyvinyl alcohol (10% aqueous solution)	10.0 parts
Water	20.0 parts

Dispersion D (Stabiliser)

1,1,3-tris(3'-cyclohexyl-4'-hydroxy-6'-methylphenyl)butane	7.5 parts
Polyvinyl alcohol (10% aqueous solution)	7.5 parts
Water	22.5 parts

A thermal coating mixture was then prepared by combining together the following components:

	parts by weight
Dispersion A	6.6


- 35 -

Dispersion B	10.0
Dispersion C	6.0
Dispersion D	2.5
Calcium Carbonate (25% aqueous dispersion)	12.0
Zinc stearate (33% aqueous dispersion)	0.9
Polyvinyl alcohol (10% aqueous solution)	4.5
Tinopal® ABP-X (fluorescent whitening agent)	0.12
Water	2.48

This coating mixture was applied on one side of a base paper weighing 50 g/m² in a coating weight of about 5.0 g/m² and then dried. The resulting sheet was calendered by means of a laboratory calender to produce a recording sheet with excellent background whiteness.

Claims

1. A heat sensitive recording material, comprising
 - a) at least one colour forming compound, and
 - b) at least one developer of the formula

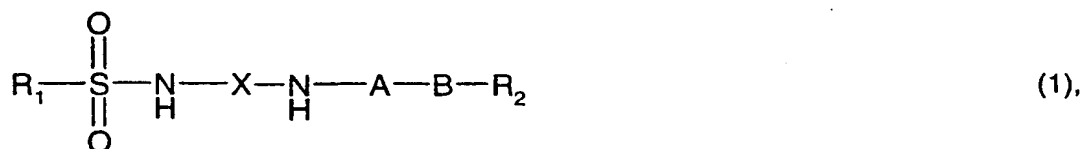

wherein

R_1 is unsubstituted or substituted phenyl, naphthyl or C_1 - C_{20} alkyl,

X is a group of the formula $\begin{array}{c} \text{NH} \\ \parallel \\ -\text{C}- \end{array}$, $\begin{array}{c} \text{S} \\ \parallel \\ -\text{C}- \end{array}$ or $\begin{array}{c} \text{O} \\ \parallel \\ -\text{C}- \end{array}$,

A is unsubstituted or substituted phenylene, naphthylene or C_1 - C_{12} alkylene, or is an unsubstituted or substituted heterocyclic group,

B is a linking group of formula $-\text{O}-\text{SO}_2-$, $-\text{SO}_2-\text{O}-$, $-\text{NH}-\text{SO}_2-$, $-\text{SO}_2-\text{NH}-$, $-\text{S}-\text{SO}_2-$, $-\text{O}-\text{CO}-$, $-\text{O}-\text{CO}-\text{NH}-$, $-\text{NH}-\text{CO}-$, $-\text{NH}-\text{CO}-\text{O}-$, $-\text{S}-\text{CO}-\text{NH}-$, $-\text{S}-\text{CS}-\text{NH}-$, $-\text{CO}-\text{NH}-\text{SO}_2-$, $-\text{O}-\text{CO}-\text{NH}-\text{SO}_2-$, $-\text{NH}=\text{CH}-$, $-\text{CO}-\text{NH}-\text{CO}-$, $-\text{S}-$, $-\text{CO}-$, $-\text{O}-$, $-\text{SO}_2-\text{NH}-\text{CO}-$, $-\text{O}-\text{CO}-\text{O}-$ and $-\text{O}-\text{PO}-(\text{OR}_2)_2$, and

R_2 is unsubstituted or substituted aryl or benzyl or C_1 - C_{20} alkyl,

with the proviso, that, if B is not a linking group of formula $-\text{O}-\text{SO}_2-$, R_2 is unsubstituted or substituted phenyl, naphthyl or C_1 - C_8 alkyl and that, if B is $-\text{O}-$, R_2 is not alkyl..

2. A recording material according to claim 1, wherein

R_1 is phenyl which is unsubstituted or substituted by C_1 - C_8 alkyl, C_1 - C_8 alkoxy or halogen.

3. A recording material according to claim 1 or 2, wherein

R_1 is phenyl which is substituted by C_1 - C_8 alkyl, C_1 - C_8 alkoxy or halogen.

4. A recording material according to any of claims 1 to 3, wherein

R_1 is phenyl which is substituted by C_1 - C_4 alkyl, preferably methyl.

5. A recording material according to any of claims 1 to 4, wherein

- 37 -

X is a group of the formula

$$\begin{array}{c} \text{O} \\ || \\ -\text{C}- \end{array}$$

6. A recording material according to any of claims 1 to 5, wherein

A is phenylene which is unsubstituted or substituted by C₁-C₈alkyl, halogen-substituted C₁-C₈alkyl, C₁-C₈alkoxy-substituted C₁-C₈alkyl, C₁-C₈alkoxy, halogen-substituted C₁-C₈alkoxy, C₁-C₈alkylsulphonyl, halogen, phenyl, phenoxy or phenoxycarbonyl; or is naphthylene; or C₁-C₁₂alkylene; or pyrimidylene which is unsubstituted or substituted by C₁-C₈alkyl.

7. A recording material according to any of claims 1 to 6, wherein

A is phenylene which is unsubstituted or substituted by C₁-C₈alkyl, halogen-substituted C₁-C₈alkyl, C₁-C₈alkoxy-substituted C₁-C₈alkyl, C₁-C₈alkoxy, halogen-substituted C₁-C₈alkoxy, C₁-C₈alkylsulphonyl, halogen, phenyl, phenoxy or phenoxycarbonyl.

8. A recording material according to any of claims 1 to 7, wherein

A is phenylene which is unsubstituted or substituted by C₁-C₈alkyl, halogen-substituted C₁-C₈alkyl, C₁-C₈alkylsulphonyl or halogen.

9. A recording material according to any of claims 1 to 8, wherein

A is phenylene which is unsubstituted or substituted by C₁-C₄alkyl or halogen, preferably unsubstituted phenylene.

10. A recording material according to any of claims 1 to 9, wherein

B is a linking group of formula -O-SO₂-, -SO₂-O-, -SO₂-NH-, -S-SO₂-, -O-CO-, -O-O-CO-NH-, -SO₂-NH-CO-, -O-CO-O- or -O-PO-(OR₂)₂, preferably a linking group of formula -O-, -O-SO₂-, -SO₂-O- or -SO₂-NH-.

11. A recording material according to any of claims 1 to 10, wherein

B is a linking group of formula -O-SO₂-.

12. A recording material according to any of claims 1 to 10, wherein

B is a linking group of formula -O- and R₂ is unsubstituted or substituted aryl or benzyl.

13. A recording material according to any of claims 1 to 12, wherein R_2 is C_1 - C_6 alkyl; halogen-substituted C_1 - C_6 alkyl; phenyl-substituted C_1 - C_6 alkyl; naphthyl-substituted C_1 - C_6 alkyl; phenyl which is unsubstituted or substituted by C_1 - C_8 alkyl, halogen-substituted C_1 - C_8 alkyl, C_1 - C_8 alkoxy-substituted C_1 - C_8 alkyl, C_1 - C_8 alkoxy, halogen-substituted C_1 - C_8 alkoxy or halogen; naphthyl and benzyl which is substituted by C_1 - C_4 alkyl or halogen.

14. A recording material according to any of claims 1 to 12, wherein R_2 is C_1 - C_4 alkyl; halogen-substituted C_1 - C_4 alkyl; phenyl which is unsubstituted or substituted by C_1 - C_4 alkyl or halogen; naphthyl or benzyl which is unsubstituted or substituted by C_1 - C_4 alkyl or halogen.

15. A recording material according to any of claims 1 to 12, wherein R_2 is phenyl which is unsubstituted or substituted by C_1 - C_4 alkyl.

16. A recording material according to any of claims 1 to 15, wherein R_1 is phenyl which is substituted by C_1 - C_4 alkyl, preferably methyl,

X is a group of the formula $\begin{array}{c} \text{O} \\ || \\ -\text{C}- \end{array}$,

A is phenylene which is unsubstituted or substituted by C_1 - C_4 alkyl or halogen, preferably unsubstituted phenylene,

B is a linking group of formula $-\text{O}-\text{SO}_2-$ or $-\text{O}-$, and


R_2 is phenyl or benzyl which is unsubstituted or substituted by C_1 - C_4 alkyl.

17. A recording material according to any of claims 1 to 16, wherein the recording material comprises at least one sensitiser.

18. A recording material according to claim 17, wherein the recording material comprises at least one sensitiser selected from the group consisting of stearamide, methylol stearamide, p-benzylbiphenyl, m-terphenyl, 2-benzoyloxynaphthalene, 4-methoxybiphenyl, dibenzyl oxalate, di(4-methylbenzyl) oxalate, di(4-chlorobenzyl) oxalate, dimethyl phthalate, dibenzyl terephthalate, dibenzyl isophthalate, 1,2-diphenoxyethane, 1,2-bis(4-methylphenoxy) ethane, 1,2-bis(3-methylphenoxy) ethane, 4,4'-dimethylbiphenyl, phenyl-1-hydroxy-2-naphthoate, 4-

- 39 -

methylphenyl biphenyl ether, 1,2-bis(3,4-dimethylphenyl) ethane, 2,3,5,6-4'-methyldiphenyl methane, 1,4-diethoxynaphthalene, 1,4-diacetoxybenzene, 1,4-dipropionoxybenzene, o-xylylene-bis(phenyl ether), 4-(m-methylphenoxyethyl) biphenyl, p-hydroxyacetanilide, p-hydroxybutyranilide, p-hydroxynonanilide, p-hydroxylauranilide, p-hydroxyoctadecanilide, N-phenyl-phenylsulphonamide and sensitizers of the formula



(3),


wherein R and R' are identical or different from each other and each represent C₁-C₆alkyl.

19. A recording material according to any of claims 1 to 18, wherein the recording material comprises at least one stabiliser.

20. A recording material according to claim 18, wherein the recording material comprises at least one stabiliser selected from the group consisting of 2,2'-methylene-bis(4-methyl-6-tert-butylphenol), 2,2'-methylene-bis(4-ethyl-6-tert-butylphenol), 4,4'-butylidene-bis(3-methyl-6-tert-butylphenol), 4,4'-thio-bis(2-tert-butyl-5-methylphenol), 1,1,3-tris(2-methyl-4-hydroxy-5-tert-butylphenyl) butane, 1,1,3-tris(2-methyl-4-hydroxy-5-cyclohexylphenyl) butane, bis (3-tert-butyl-4-hydroxy-6-methylphenyl) sulfone, bis (3,5-dibromo-4-hydroxyphenyl) sulfone, 4,4'-sulfinyl bis (2-tert-butyl-5-methylphenol), 2,2'-methylene bis (4,6-di-tert-butylphenyl) phosphate and alkali metal, ammonium and polyvalent metal salts thereof, 4-benzyloxy-4'-(2-methylglycidyoxy) diphenyl sulfone, 4,4'-diglycidyoxydiphenyl sulfone, 1,4-diglycidyoxybenzene, 4-[α-(hydroxymethyl)benzyloxy]-4-hydroxydiphenyl sulfone, metal salts of p-nitrobenzoic acid, metal salts of phthalic acid mono benzyl ester, metal salts of cinnamic acid and mixtures thereof.

21. A compound of the formula

- 40 -

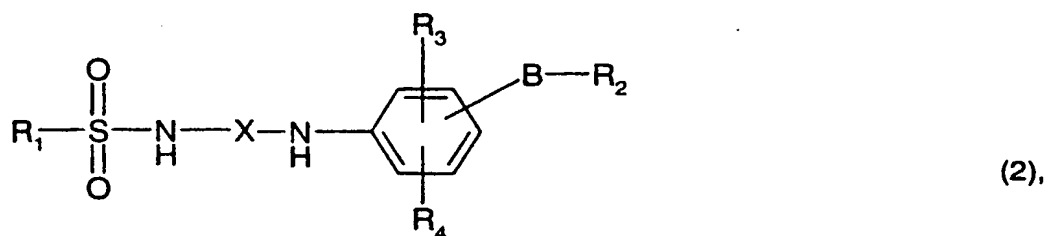

wherein

R_1 is unsubstituted or substituted phenyl, naphthyl or C_1 - C_{20} alkyl,

R_3 and R_4 independently of each other are hydrogen, C_1 - C_8 alkyl, halogen-substituted C_1 - C_8 alkyl, C_1 - C_8 alkoxy-substituted C_1 - C_8 alkyl, C_1 - C_8 alkoxy, halogen-substituted C_1 - C_8 alkoxy, C_1 - C_8 alkylsulphonyl, halogen, phenyl, phenoxy or phenoxycarbonyl,

X is a group of the formula $\begin{array}{c} \text{NH} \\ || \\ -\text{C}- \end{array}$, $\begin{array}{c} \text{S} \\ || \\ -\text{C}- \end{array}$ or $\begin{array}{c} \text{O} \\ || \\ -\text{C}- \end{array}$,

B is a linking group of formula $-\text{O}-\text{SO}_2-$, $-\text{SO}_2-\text{O}-$, $-\text{SO}_2-\text{NH}-$, $-\text{O}-\text{CO}-$ or $-\text{CO}-\text{NH}-\text{SO}_2-$, and

R_2 is unsubstituted or substituted phenyl, naphthyl or C_1 - C_{20} alkyl,

with the proviso, that, if B is not a linking group of formula $-\text{O}-\text{SO}_2-$, R_2 is unsubstituted or substituted phenyl, naphthyl or C_1 - C_8 alkyl.

22. A compound according to claim 21, wherein

R_1 is phenyl which is substituted by C_1 - C_4 alkyl, preferably methyl,

X is a group of the formula $\begin{array}{c} \text{O} \\ || \\ -\text{C}- \end{array}$,

R_3 and R_4 independently of each other are hydrogen, C_1 - C_4 alkyl or halogen, preferably hydrogen,

B is a linking group of formula $-\text{O}-\text{SO}_2-$, and

R_2 is phenyl which is unsubstituted or substituted by C_1 - C_4 alkyl.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/09473

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B41M5/30 C07C311/60 C07C317/50 C07C311/62 C07C311/51

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B41M C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 701 905 A (NEW OJI PAPER) 20 March 1996 (1996-03-20) page 3 -page 5; claims 1-4	1-22
X	EP 0 526 072 A (OJI PAPER) 3 February 1993 (1993-02-03) page 3 -page 4	1-22
X	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 03, 31 March 1997 (1997-03-31) & JP 08 295081 A (NEW OJI PAPER), 12 November 1996 (1996-11-12) abstract	1-21
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 May 2000

Date of mailing of the international search report

16/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 851 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

English, R

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/09473

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 08, 30 June 1998 (1998-06-30) & JP 10 058836 A (OJI PAPER CO LTD), 3 March 1998 (1998-03-03) abstract	1-22
A	EP 0 535 887 A (OJI PAPER) 7 April 1993 (1993-04-07)	1-22
X	F. BRIGANTI, ET AL.: "Sulphonylamido derivatives of aminogluthethimide and their copper(II) complexes: a novel class of antifungal compounds" EUROPEAN JOURNAL OF MEDICINAL CHEMISTRY, vol. 32, no. 11, November 1997 (1997-11), pages 901-910, XP004100674 Editions Scientifiques Elsevier, Paris, FR ISSN: 0223-5234 compounds 6, 7	21
X	C.T. SUPURAN, ET AL.: "The antifungal activity of sulphonylamido derivatives of 2-aminophenoxathiin and related compounds" EUROPEAN JOURNAL OF MEDICINAL CHEMISTRY, vol. 33, no. 10, October 1998 (1998-10), pages 821-830, XP004160044 Editions Scientifiques Elsevier, Paris, FR ISSN: 0223-5234 compounds 35, 36	21
X	C.T. SUPURAN, ET AL.: "Sulphonylamido derivatives of 2-aminophenoxathiin-10,10-dioxide and related compounds possess antifungal action due to the possible inhibition of lanosterol-14-alpha-demethylase" JOURNAL OF ENZYME INHIBITION, vol. 13, no. 4, 1998, pages 291-310, XP000905544 Harwood Academic Publishers, New York, NY, US compounds 33 - 36	21
X	EP 0 860 738 A (KONISHIROKU PHOTO) 26 August 1998 (1998-08-26) compound H-42	21

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/EP 99/09473

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0701905 A	20-03-1996	JP 8208593 A JP 8132737 A DE 69506814 D DE 69506814 T US 5702850 A	13-08-1996 28-05-1996 04-02-1999 19-08-1999 30-12-1997
EP 0526072 A	03-02-1993	JP 2679459 B JP 5032061 A JP 2679478 B JP 5116459 A DE 69204777 D DE 69204777 T US 5246906 A	19-11-1997 09-02-1993 19-11-1997 14-05-1993 19-10-1995 22-02-1996 21-09-1993
JP 08295081 A	12-11-1996	NONE	
JP 10058836 A	03-03-1998	NONE	
EP 0535887 A	07-04-1993	JP 2679524 B JP 5147357 A JP 2666655 B JP 5148220 A DE 69203558 D DE 69203558 T US 5256618 A	19-11-1997 15-06-1993 22-10-1997 15-06-1993 24-08-1995 04-04-1996 26-10-1993
EP 0860738 A	26-08-1998	JP 10239810 A JP 10239808 A US 5972577 A	11-09-1998 11-09-1998 26-10-1999